


RECESSED SEAT-COVER DISPENSER

TSC-2

Date:

Project Name:

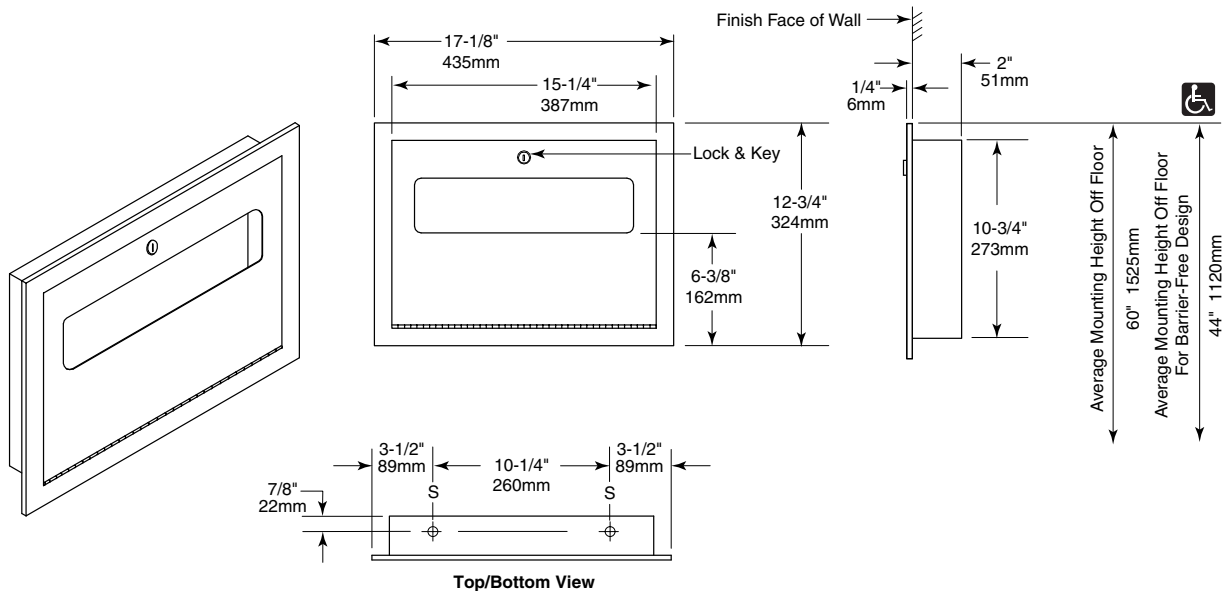

Rough Wall Opening:

15-5/8" (397mm) Wide
11-1/4" (286mm) High
2" (51mm) minimum
recessed depth

CONSTRUCTION:

Unit fabricated of 22-gauge (0.8mm), 18-8 type 304 stainless steel with exposed surfaces having a #4 satin-finish. Doors provided with tumbler lock and full length stainless steel piano-hinge. One piece flange provided with 1/4" (6mm) return for rigidity. All welded construction.

CAPACITY:

Dispenses 500 toilet seat covers.

INSTALLATION:

Provide framed wall opening. Recessed depth required from finish face of wall is 2" (51mm). Check plans and coordinate with mechanical engineer to avoid protrusion from opposite wall, pipes, conduits, electrical wiring etc. If installing in plaster wall, recommend grounding. If installing where unit projects above top of wainscot, provide filler to prevent gap from finished wall and flange of unit. If installing in block walls, use metal expansion shields.

OVERALL DIMENSIONS:

17-1/8" W x 12-3/4" H x 2-1/4" D (435 x 324 x 57mm)

Recessed Seat-Cover Dispenser shall be Model TSC-2 of Gamco Commercial Restroom Accessories, A Division of Bobrick, One Gamco Place, Durant, OK